




Values in mm / nominal

Electrical characteristics of base reedswitch		
Contact form	—	A
Contact rating max.	W/VA	250
Switching voltage max.	VDC	250
	VAC	250
Switching current max.	A	5.0
Carry current max.	A	5.0
Breakdown voltage min.	VDC	700
Contact resistance (initial) max.	mΩ	150
Environmental characteristics of base reedswitch		
Operating temperature range	°C	-60...+100
Material Information		
1	Reedswitch	50 mm glass length
2	Magnet material	Ferrite
3	Heat shrink tube	Standard

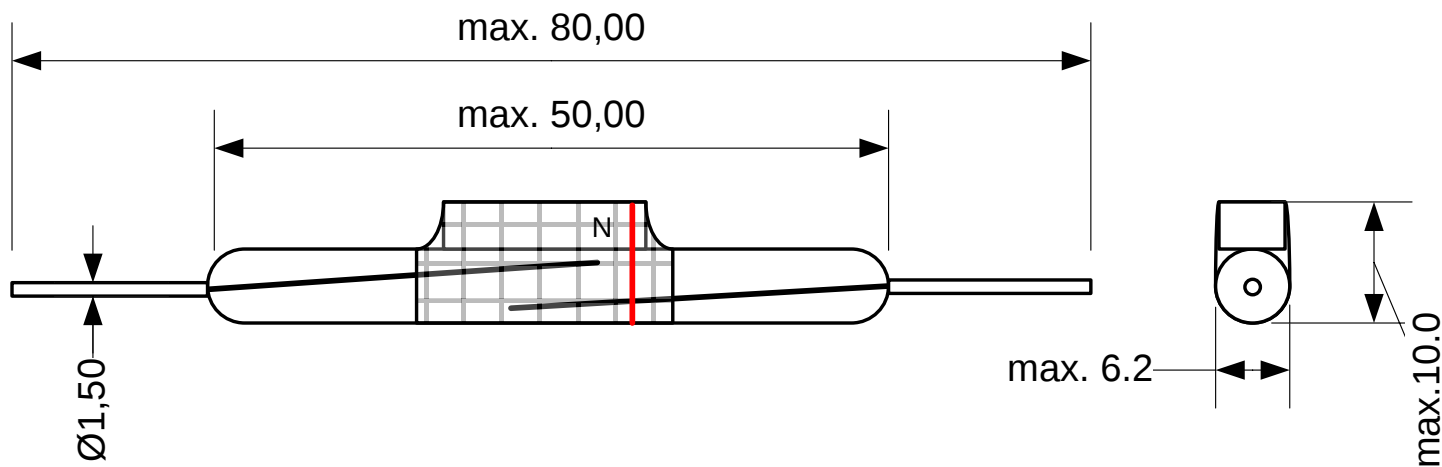

Latching function can be influenced in case of further modification of Reedswitch!
In case of different requirements compared to above standard values please get in contact with the masetec team.