




MMS-304-X-X-1=150mm
MMS-304-X-X-2=300mm
MMS-304-X-X-3=500mm

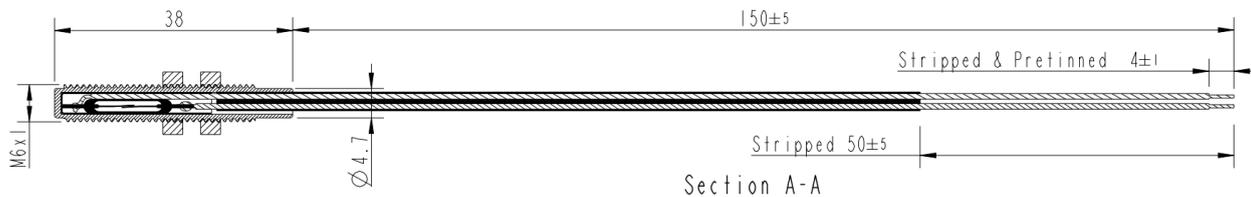

Values in mm / nominal

Electrical Characteristics							@25°C
Switch available for this series	—	1	2	3	4	5	
Contact form	—	A	A	A	B	C	
Contact rating max.	W/VA	10					
Switching voltage max.	VDC VAC	200 140					
Switching current max.	A	0.5					
Carry current	A	1.0					
Breakdown voltage min.	VDC	250					
Total resistance max. (initial)	mΩ	150					
Magetical Characteristics (of unmodified Reed Switch)							@25°C
Switch	—	1	2	3	4	5	
Pull in (available range)	AT	10-25					
Drop out min.	AT	5					
Environmental Characteristics							
Operating temperature	°C	-20...+80					
Material Information							
Switch	—	1	2	3	4	5	
Housing material	—	Brass					
Housing plating	—	Ni					
Cable type	—	UL2464					
Cable AWG	—	2 x 28					
Cable color	—	red (bk/rd)					
Available Magnet	Part Number Example					Approvals	
MMA-304	MMS-304-1-1-3 MMS-304 Series with Switch # 1 10-15AT 500mm Cable					RoHS,REACH	