


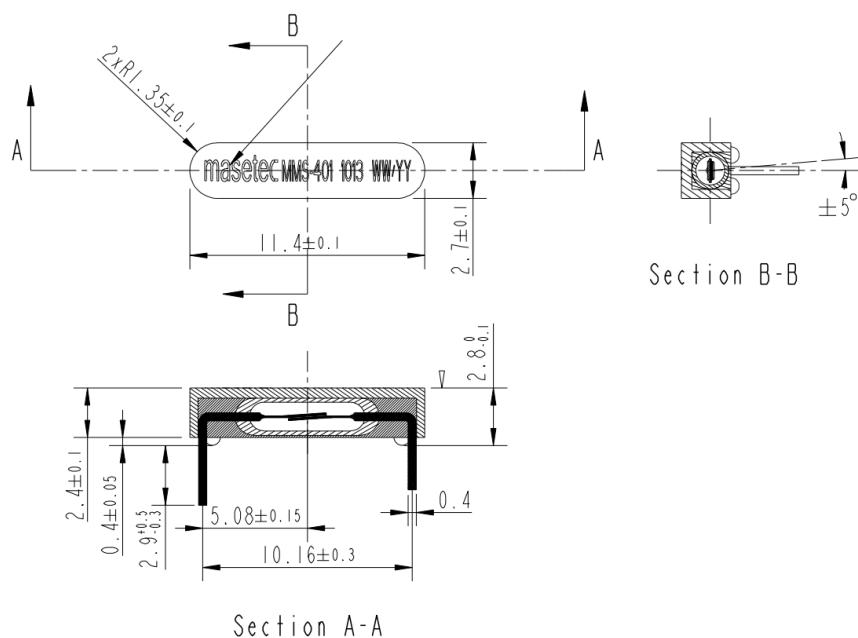

Electrical Characteristics							@25°C
Switch available for this series	—	1	2	3	4	5	
Contact form	—	A	A	A	B	C	
Contact rating max.	W/VA	1	—	—	—	—	
Switching voltage max.	VDC VAC	24 24	—	—	—	—	
Switching current max.	A	0.1	—	—	—	—	
Carry current	A	0.3	—	—	—	—	
Breakdown voltage min.	VDC	150	—	—	—	—	
Total resistance max. (initial)	mΩ	200	—	—	—	—	
Magnetical Characteristics (of unmodified Reed Switch)							@25°C
Switch	—	1	2	3	4	5	
Pull in (available range)	AT	10-25	—	—	—	—	
Drop out min.	AT	5	—	—	—	—	
Environmental Characteristics							
Operating temperature	°C	-20...+80	—	—	—	—	
Material Information							
Switch	—	1	2	3	4	5	
Housing material	—	PA66GF	—	—	—	—	
Housing color	—	blue	—	—	—	—	
Available Magnet		Customized version (available upon request)			Approvals		
n/a		AT value / Housing color / Cable assembly / connector assembly			RoHS,REACH		